

VELOWUP


VERTICAL BICYCLE RACK



Klave®
FIETSPAAREREN

VELOWUP VERTICAL BICYCLE RACK


The VelowUp is a space-saving bicycle parking system for vertical bicycle parking. Using the gas spring, bicycles can be easily hung on the wall for both children and adults.

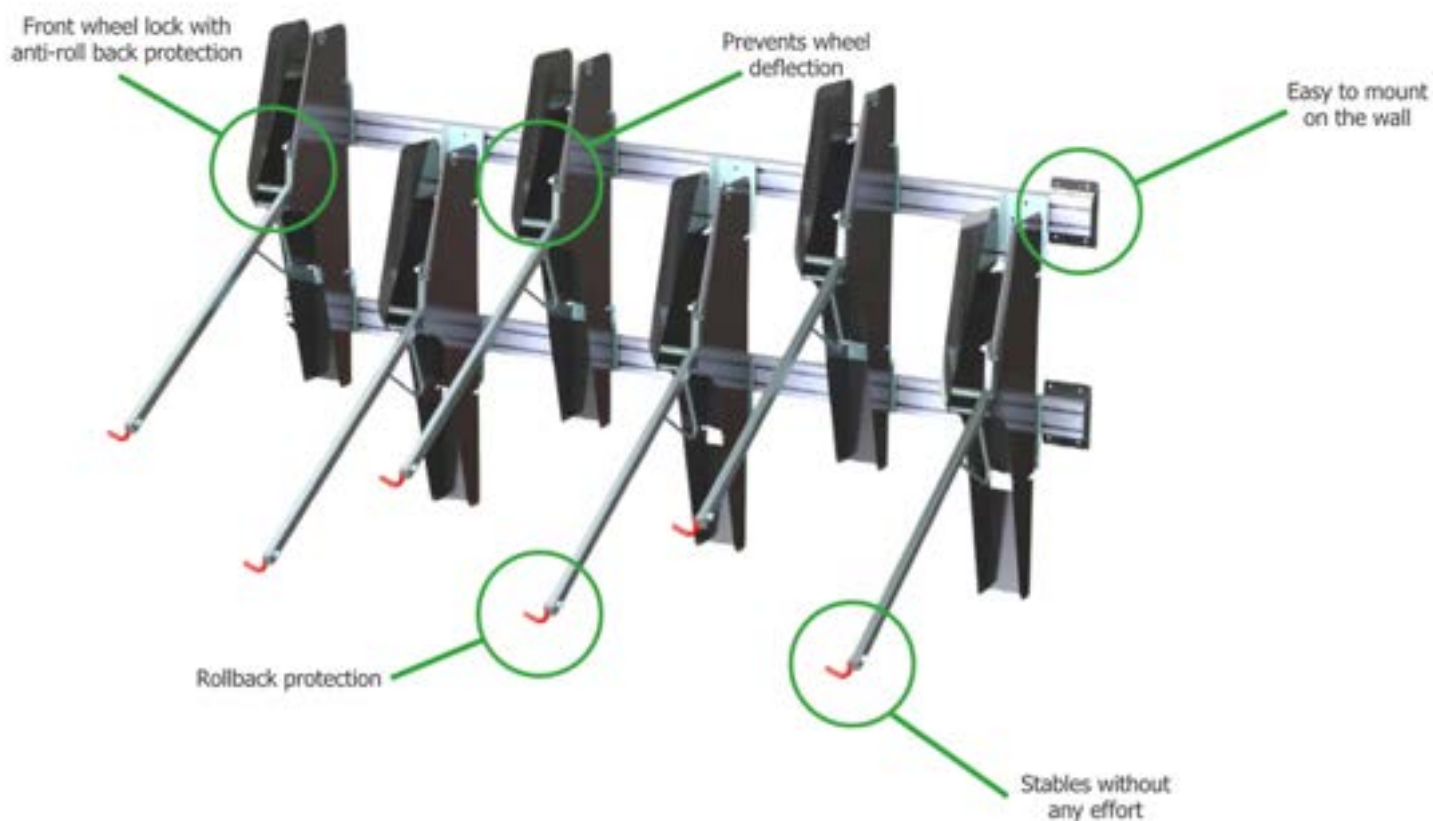

VARIANTS


VELOWUP WALL MOUNTING

Shown here are 6 single-sided VelowUp's which are mounted directly to the wall.

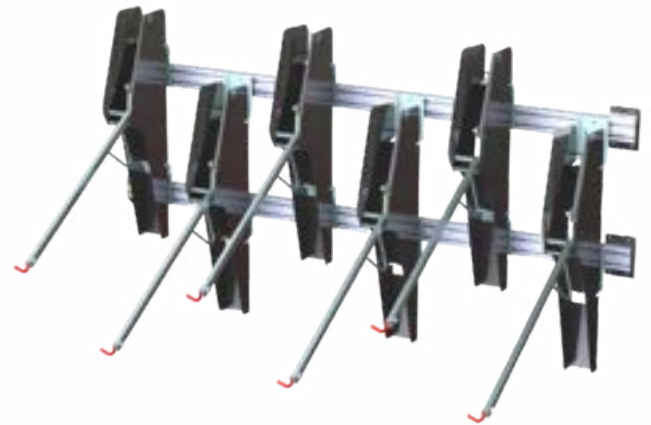

VELOWUP RACK MOUNTING

Shown here are 6 single-sided VelowUp's attached to a rack with floor braces.

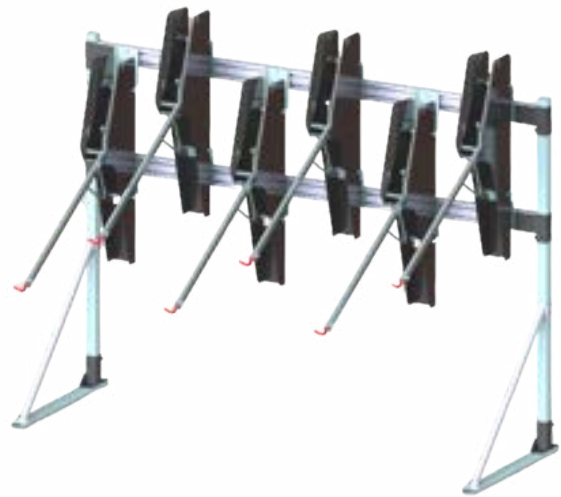

MEASUREMENTS



CERTIFICATION

The VelowUp has been awarded the FietsParKeur quality mark. This means that the VelowUp meets the requirements set by the FietsParKeur foundation to guarantee the quality of the bicycle racks.

AVAILABLE COLOURS

The VelowUp is standard in galvanized steel, but can be delivered in any RAL colour if required.

VERSIONS

The VelowUp is available single-sided and double-sided.

MEASUREMENTS



INSTALLATION OF VELOWUP

- Minimum required height is 1.95m
- Height difference of 25 cm for high/low ratio
- The minimum required height for the "low" VelowUp's is 1.95m, for the "high" VelowUp's a height of 2.2m is required
- Center-to-center distance of at least 35 cm (wider possible)
- A minimum center-to-center distance of 60 cm for VelowUp's at the same height

WALL MOUNTING


High-quality aluminium profiles can be used for wall mounting. The aluminium profiles allow the mutual distance between the VelowUps to be adjusted very easily at any time, without drilling.

RACK MOUNTING

If the wall has insufficient load-bearing capacity (e.g. a plasterboard wall), the aluminium profiles are fitted with uprights with floor braces. The distance between the VelowUps can be adjusted quickly and efficiently at any time.

PROJECTS

VelowUp Rack Mounting

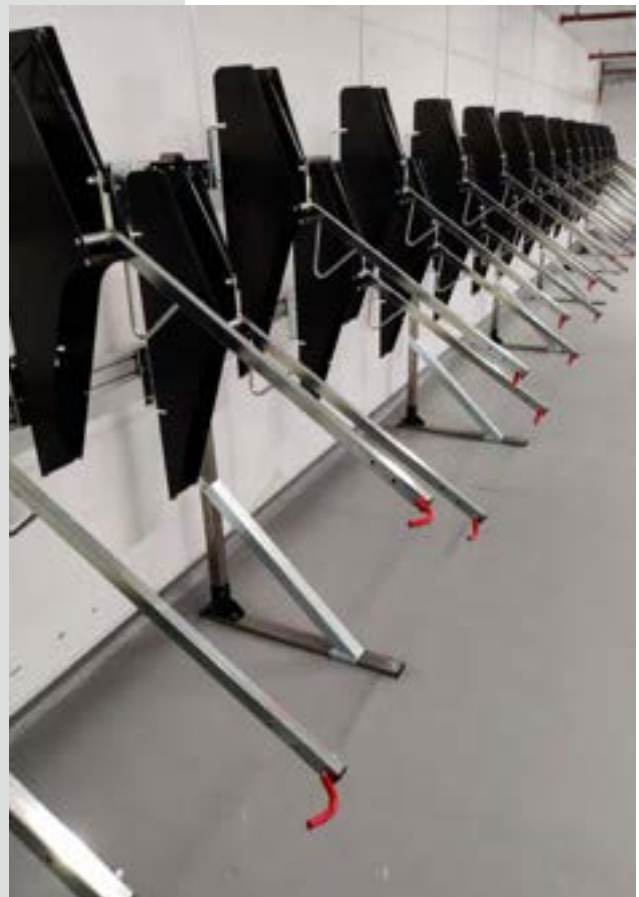

PROJECTS

VelowUp Wall Mounting

